


Posidonia

MOORING AND TOWING MARINE EQUIPMENT

Improved double bollards RINA approved

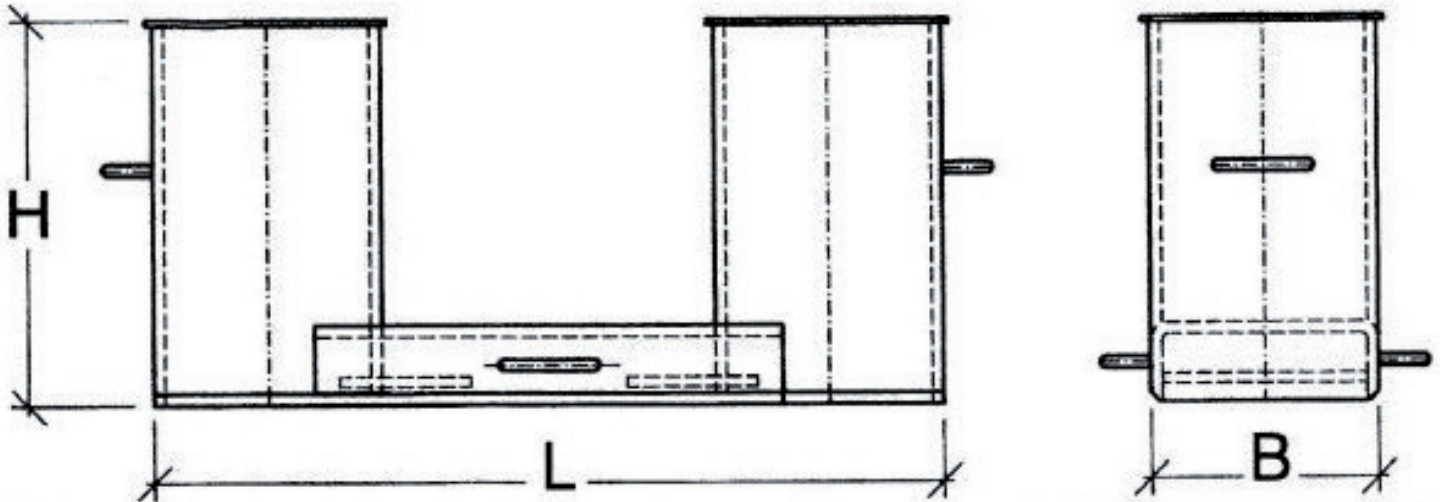

DES.	D	B	L	H	SWL (Tons)	
					Figure A	Figure B
125	140	455	250	18	36	
160	160	568	300	21	42	
200	219	719	400	34	68	
250	273	903	500	43	86	
315	324	1124	600	67	134	
350	356	1256	650	73	146	
400	406	1406	700	83	166	
500	508	1738	830	142	284	
630	610	2180	1000	172	344	
710	711	2461	1100	228	456	



FIGURE A (CABLE LOAD = SWL)
CABLE WOUND IN "FIGURE OF 8" AND POSITIONED UNDER THE SEPARATOR:
CABLE LOAD=SWL



FIGURE B (CABLE LOAD = 2 SWL)
CABLE END EYE POSITIONED ON ONE BOLLARD ONLY :CABLE LOAD=2 SWL

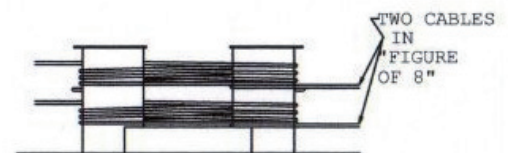


FIGURE C (EACH CABLE = 1/2 SWL)
TWO CABLES IN "FIGURE OF 8" POSITIONED OVER UNDER THE SEPARATOR: EACH CABLE LOAD=1/2 SWL

CERTIFICATIONS:

