


Escort Bollard 100T- 200T

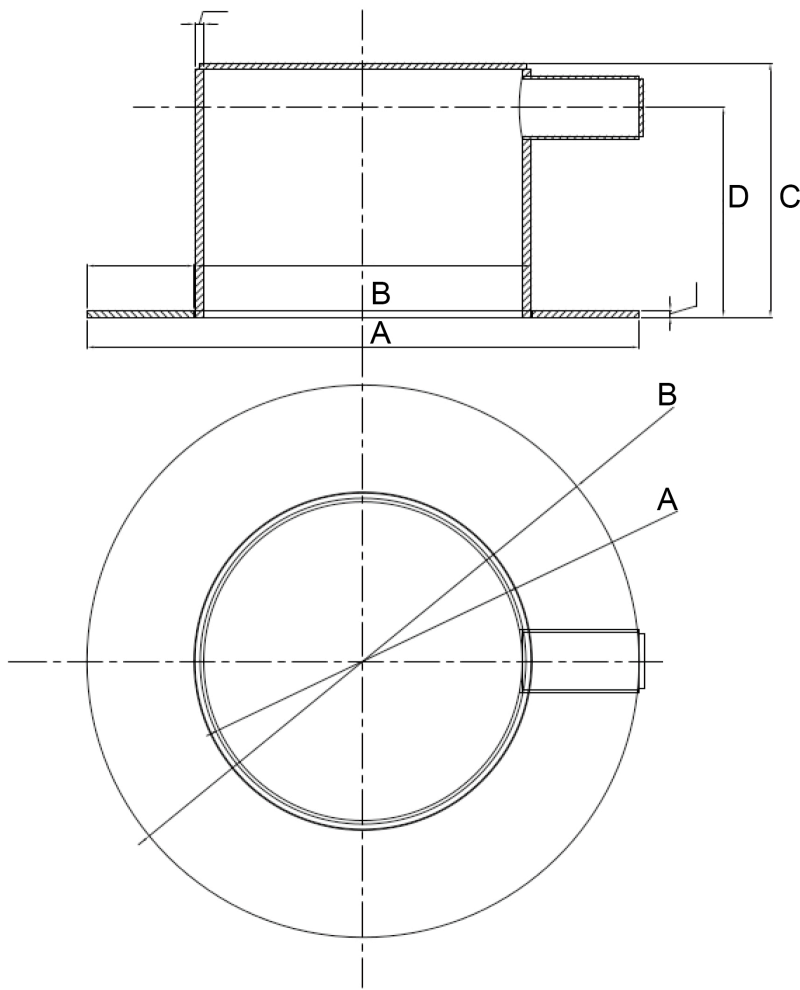

POSIDONIA is able to provide Escort Bollard according to the "OCIMF recommendations for ship fittings to be used with tugboats" (First edition 2002).

- Escort bollard Strong Point with a minimum SWL of 100T for tankers over 20,000 DWT but less than 50,000 DWT.

Escort Bollard	A	B	C	D
200 T	1000	609	450	384
100 T	1000	609	380	460

Note: The measurements in the tables may vary depending on the model. This brochure is for informational purposes only; please contact us for specific details. Posidonia cannot be held liable for any discrepancies between the tables and the delivered equipment.

